


ITEM	COPARTNER P/N	LENGTH
1	LS-14100805	1000±30
2	LS-14100806	500±25

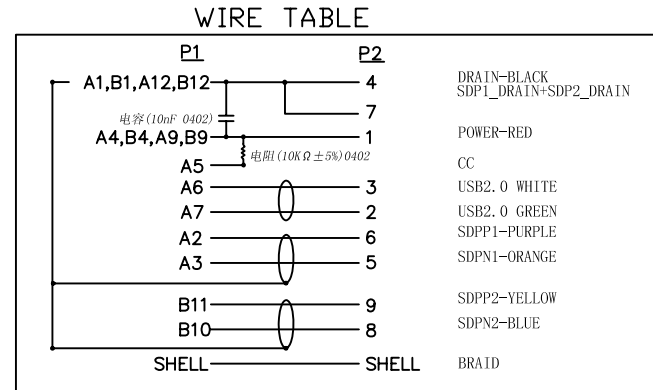

5	PVC	45P PVC BLACK	A/R	9
4	PE	PE NATURAL	A/R	9
3	CONN	USB3.1 A/M BLUE INSULATOR SOLDER TYPE	1	SET
2	CONN	USB3.1 C TYPE MALE BLACK INSULATOR SOLDER TYPE 电阻(10KΩ±5%)0402+电容(10nF 0402)(TYPE C 3.0)	1	SET
1	CABLE	UL20276 (1P*32#+D+AL+Mylar)*2+1P*32#+2C*26#+AL+B PVC BLACK JACKET,OD:4.2mm	A/R	mm
Item	Name	Description	Q'TY	Unit

ELECTRICAL PROPERTIES:
 1:100% OPEN&SHORT TEST
 3:CONTACT RESISTANCE: 2 ohm MAX
 3:INSULATION RESISTANCE:5MEGA ohm (MIN)/300VDC/10ms

B	-----	ADD CAPACITOR & RESISTOR	2015.01.06
A	-----	INITIAL RELEASER	2014.10.08
REVISION	ECN. NO.	REASON	DATE

THIS DOCUMENT IS THE PROPERTY OF CABLEX AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF Copartner TECHNOLOGY .

金锋电子科技有限公司
JINN FENG ELECTRONIC TECH CO.,LTD

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: XXXXX

DESCRIPTION: USB3.1 CM TO USB3.1 AM L=0.5M/1.0M

DIMENSIONS	TOLERANCE	
	INCH	M M
.X	±0.15	±0.30
.XX	±0.10	±0.10
.XXX	±0.005	±0.05

CUS. NAME:
 CUS. P/N:
 COPARTNER P/N:
 ENGINEERING NO: LS-14100805-06
 LOCATION: DONG GUAN DATE: 2015.01.06
 SCALE: SHEET: 1 OF 1 UNIT: mm REV: B

DRAW WSC
 CHECK [Signature]
 APPROVED JEDI WANG