


ITEM	COPARTNER	P/N	LENGTH
1	LS-14100819		1000±30
2	LS-14100820		500±25

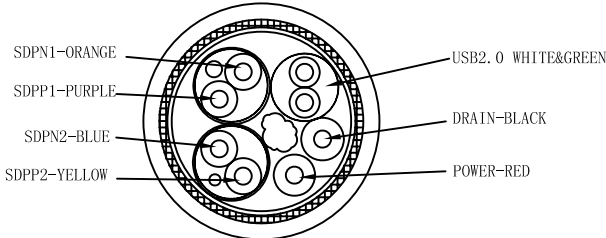

P1	P2	Notes
A1, B1, A12, B12	4	DRAIN-BLACK
	7	SDP1_DRAIN+SDP2_DRAIN
		电阻 (5.1KΩ ±5%) 0402
A5		CC
		电容 (10nF 0402)
A4, B4, A9, B9	1	POWER-RED
A6	3	USB2.0 WHITE
A7	2	USB2.0 GREEN
A2	9	SDPP1-PURPLE
A3	8	SDPN1-ORANGE
B11	6	SDPP2-YELLOW
B10	5	SDPN2-BLUE
SHELL	SHELL	BRAID

Item	Name	Description	Q/TY	Unit
5	PVC	45P PVC BLACK	A/R	9
4	PE	PE NATURAL	A/R	9
3	CONN	USB3.1 AF WHITE INSULATOR SOLDER TYPE	1	SET
2	CONN	USB3.1 C TYPE MALE BLACK INSULATOR SOLDER TYPE 电阻(5.1KΩ±5%)0402+电容(10nF 0402)	1	SET
1	CABLE	UL20276 (1P*32#+D+AL+Mylar)*2+1P*32#+2C*26#+AL +B PVC BLACK JACKET,OD:4.2mm	A/R	mm

ELECTRICAL PROPERTIES:
 1:100% OPEN&SHORT TEST
 3:CONTACT RESISTANCE: 2 ohm MAX
 3:INSULATION RESISTANCE:5MEGA ohm
 (MIN)/300VDC/10ms

REVISION	ECN. NO.	REASON	DATE
B	-----	ADD CAPACITOR & RESISTOR	2015.01.06
A	-----	INITIAL RELEASER	2014.10.08

THIS DOCUMENT IS THE PROPERTY OF CABLEX AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF Copartner TECHNOLOGY .

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: XXXXX

金锋电子科技有限公司
 JINN FENG ELECTRONIC TECH CO.,LTD

DESCRIPTION: USB3.1 CM TO USB 3.1 AF L=0.5M/1.0M

DIMENSIONS	TOLERANCE	
	INCH	MM
.X	±0.015	±0.30
.XX	±0.010	±0.10
.XXX	±0.005	±0.05

THE 3TH VIEW

DRAW WSC
 CHECK [Signature]
 APPROVED JEDI WANG

ENGINEERING NO: LS-14100819-20
 LOCATION: DONG GUAN
 DATE: 2015.01.06

SCALE: SHEET: 1 OF 1 UNIT: mm REV: B